SURFACE TREATMENT TECHNOLOGY




31110

SHAKE BLAST




Sinto Technology Offers The Special Trough Shake Blast For Steady In-Line Blasting.

The gentle turning and intensive blasting by impellers directly above the workload provide uniform cleaning even for difficult to clean parts.

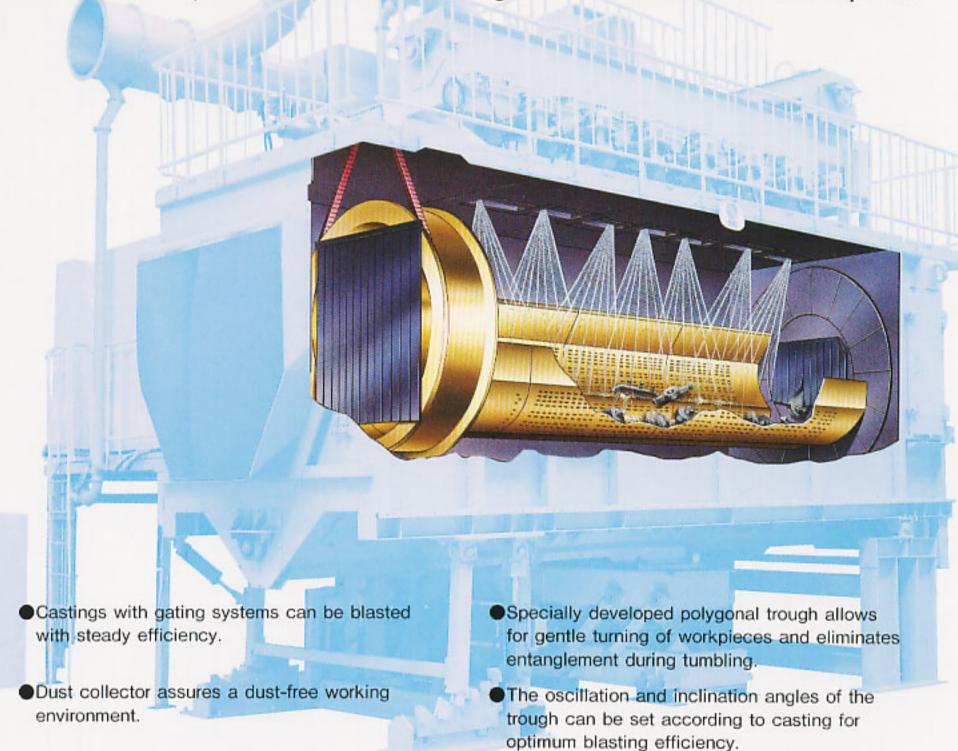


Compact Design For Easy Integration In The Production Line Contributes To Both Simplification And Automation Of Fettling.


Shakeblast is designed for easy in-line installation in existing works. After cooling, castings with gates are transported to the Shakeblast automatically.

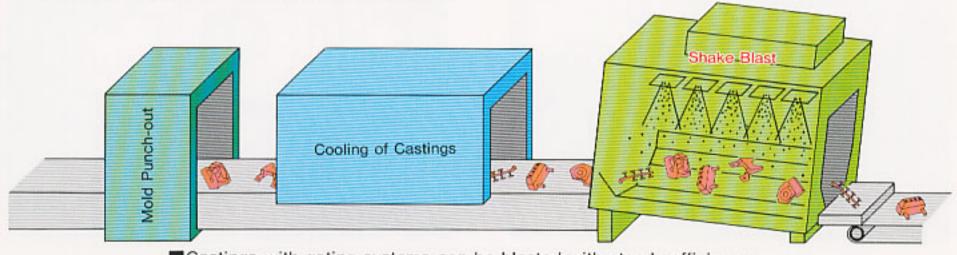

Castings with gating systems can be blasted with steady efficiency.

MACHINE DIMENSIONS

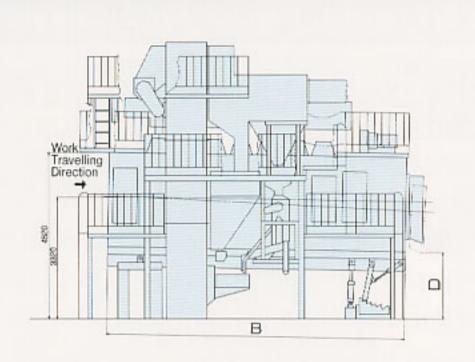

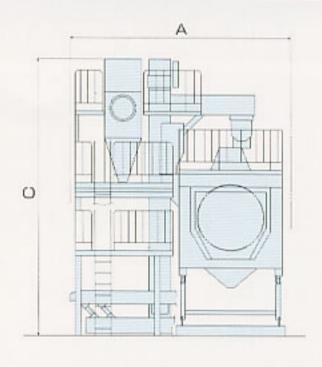

Model	SUA-5	SUA-8	SUA-10			
Α	6000mm					
В	6500mm	8100mm				
С	7500mm					
D	1749mm	1600mm				

Specifications are subject to change without prior notice.

SPECIFICATIONS

Model		SU	SUA-5		JA-8	SUA-10		
Blasting Capacity		5-81	5-8 ton/hr 8-10 ton/hr		10-15ton/hr			
Maximum	Size		800×550×400mm					
Workpiece	Weight		150kg.					
Blasting	Model		X-30(22kW×4P)					
Wheel	Quantity		5	6		7		
Shaking of Trough		P	Angle: 4-step selection(Hydraulic motor driven)					
Inclination of Trough Angle:5-step selection(Hydraulic cylinder)						lic cylinder)		
Dust	Model		Continuous Ultra Jet					
Collector	Air Flow	300n	n³/min.	400	m³/min.	400m³/min		

[■]Specifications are subject to change without prior notice.

Sinto companies form a solid worldwide network committed to the philosophy we call "3 in 1". Sinto's "3 in 1" philosophy is to delivery our customers superior engineering and technologically advanced equipment, high quality shot and abrasives, and responsive maintenance and technical services. The "3 in 1" philosophy is shared throughout Sinto's worldwide organization, with each member contributing engineering, resources, and experience to provide the latest technology.



SINTOKOGIO, LTD.

Toyota Bldg, Meieki 4-chome 7-23 Nakamura-ku, Nagoya 450, Japan. TEL(052)582-9217 FAX(052)586-2279